


Note: install R2 only if no IAT sensor is installed - typically GM ecm '747 J1

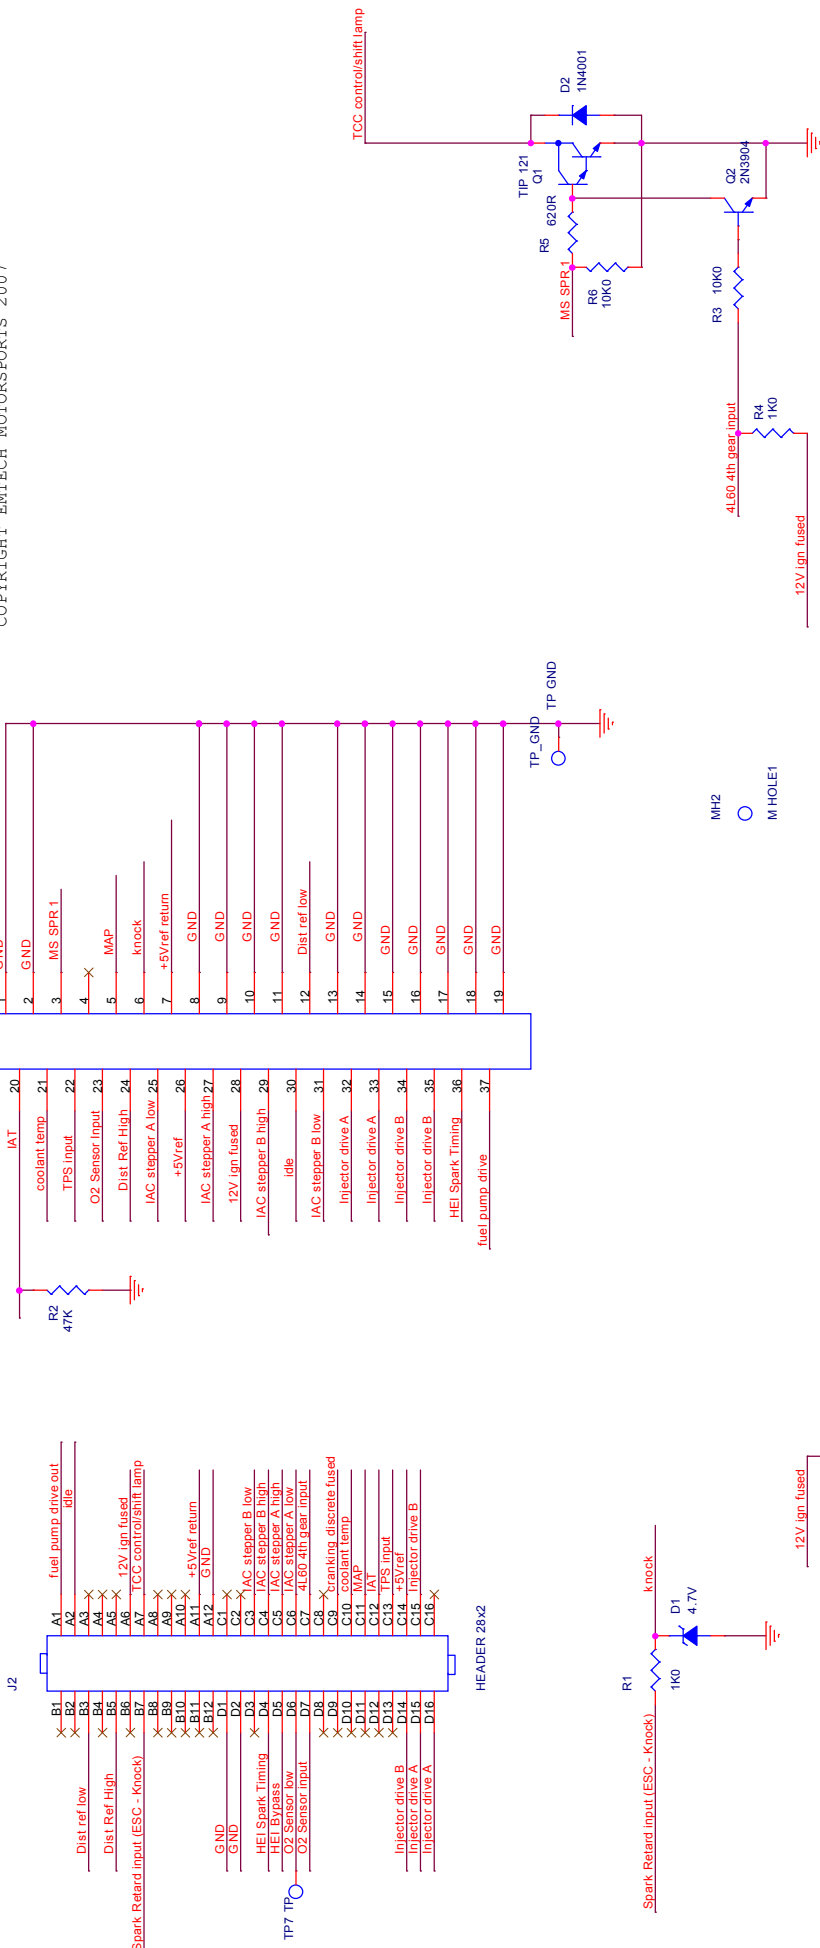

Install Q2, R3 and R4 for automatic transmissions only. Also the 4th gear pressure switch output must have +12 while in 1,2,3 & rev. gear, 0v when in 4th (OD). This inhibits TC Lockup until in OD.

EMTech MotorSports 2007	
Title	Megasquirt GM 747 Adapter
Size	B
Document Number	<Doc>
Rev	2
Date:	Monday, July 23, 2007
Sheet	1 of 1